



# 11-IN-1 USB-C Multiport Docking Station

Supports Dual HDMI, VGA Port, USB 3.2, PD, RJ45, TF, SD Cards & Thunderbolt 3 Compatible



Model: AUH-4050

## QuickGuide

English

www.adesso.com

### LIMITED WARRANTY

Adesso® provides a one year limited warranty for all of its products against defects in materials and workmanship.

During this period, Adesso® will repair or replace any product which proves to be defective. However, Adesso® will not warrant any product which has been subject to improper handling, abuse, negligence, improper installation or unauthorized repair. The warranty will not cover products installed with components not approved by Adesso® and products where the sealed assembly trace has been broken.

If you discover a defect, Adesso® will, at its option, repair or replace the product free of charge, provided you return it during the warranty period with freight charges pre-paid to Adesso®. Before returning any product, you must obtain a Return Merchandise Authorization number (RMA). This RMA # must be clearly marked on the outside of the package you are returning for warranty service. Be certain to also include your name, shipping address (no PO Boxes), telephone number, and a copy of the invoice showing proof of purchase in the package.

### SUPPORT

FAQ's <http://www.adesso.com/faqs>  
 Email Support: [support@adesso.com](mailto:support@adesso.com)

Telephone Support:  
 Toll Free: (800) 795-6788  
 9:00AM to 5:00PM PST Monday - Friday

### INTRODUCTION

The Adesso 11-IN-1 USB-C Multiport docking station is simple to use, just plug and play! Expand your laptop and TYPE-C device's connection port with this USB Type-C multiport docking station. It has dual HDMI ports and 1VGA port for transmitting 4K content to your external monitor and can also charge other devices. This USB Type-C multi-port docking station has 3 USB 3.2 Gen 1 superspeed ports, SD and TF card reader slots, 1 RJ45 Port, and 1 3.5mm Audio Jack.

### SPECIFICATIONS

Connection: 1x Type-C port, 2x USB 3.2-A (5 Gbps), 1x USB 3.2-C (5 Gbps), 1x PD (Up to 100 W), 2x HDMI(4K/30Hz, 1080P/60Hz) 1x VGA(1080P/60Hz) 1x TF, 1x SD Cards (480 Mbps), 1x RJ45 (10/100/1000 Mbps) 1x 3.5mm Audio Jack  
 Current Input: USB Type-C,PD 3.0 PD 5V-20V, Max 5A, up to 65 W  
 HDMI Max Refresh Rate: 4K @30HZ  
 Dimension: 3.6" x 3.6" x 1.2" (92 x 92x 30mm)  
 Weight: 4.4 oz (125 g)  
 Cable Length: 11.8 Inch (30 cm)


### REQUIREMENTS

Operating System: Windows® 11/10 / 8 / 7, MacOS® 10.3 and above, Android, Chrome  
 Connectivity Interface: An Available USB-C port

### CONTENTS


1x AUH-4050 1x Quick Start Guide 1x 65 W PD Adapter

### OVERVIEW

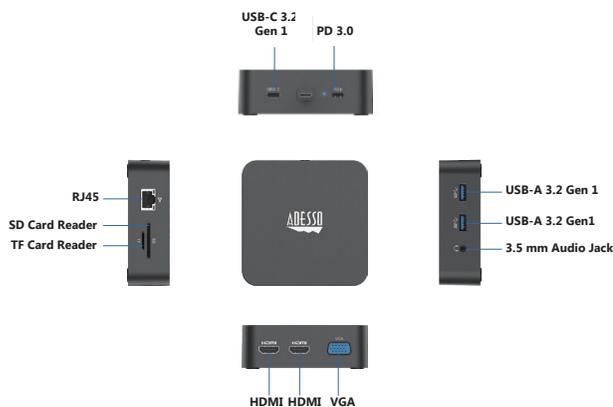

### GETTING STARTED

1. Insert the USB-C cable into the power adapter
2. Plug in the power adapter into an outlet.
3. Insert the USB-C cable into the PD port of the docking station.
4. Plug in the USB-C connector into a USB-C port on your device.

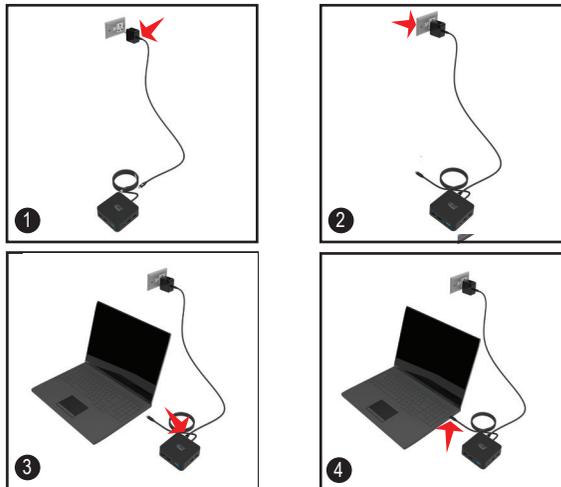

### GENERAL INFORMATION

#### About USB 3.0 and USB 3.2 Gen 1

USB 3.0 is also known as USB 3.2 Gen 1. This connectivity standard offers speeds up to 5Gbps.

#### About USB-C

Not all USB-C ports support the full functionality of the USB Type-C standard. Some ports might only provide data transfers, and might not support video or USB Power Delivery 3.0. For this adapter to operate properly, check to ensure that your host laptop supports DP Alt Mode and USB Power Delivery 3.0.

If your laptop supports DP Alt Mode, but not USB Power Delivery, then the multiport docking station will be powered by your laptop's host USB-C port.

Thunderbolt™ 3 technology also uses the USB-C connector, so you can connect the adapter to a Thunderbolt 3 port. The adapter will connect to the Thunderbolt 3 port at the USB speed of 5Gbps.

USB Power Delivery 3.0 is a specification that allows power (up to 100 watts) to be sent over a USB-C or Thunderbolt™ 3 cable that supports the specification. The adapter supports USB Power Delivery 3.0, delivering up to 100 watts of power through the USB-C or Thunderbolt 3 port on your laptop.

DisplayPort Alternative Mode is a specification that allows a video signal to transfer over USB-C.