

Antimicrobial & Waterproof **2D Barcode Scanner**



Model: NuScan 5200TU

Quick**Guide** English

www.adesso.com

DESCRIPTION



LIMITED WARRANTY

Adesso® provides a one year limited warranty for all of its products against defects in materials and workmanship.

During this period, Adesso® will repair or replace any product which proves to be defective. However, Adesso® will not warrant any product which has been subject to improper handling, abuse, negligence, improper installation or unauthorized repair. The warranty will not cover products installed with components not approved by Adesso® and products where the sealed assembly trace has been broken.

If you discover a defect, Adesso® will, at its option, repair or replace the product free of charge, provided you return it during the warranty period with freight charges pre-paid to Adesso®. Before returning any product, you must obtain a Return Merchandise Authorization number (RMA). This RMA # must be clearly marked on the outside of the package you are returning for warranty service. Be certain to also include your name, shipping address (no PO Boxes), telephone number, and a copy of the invoice showing proof of purchase in the package.

SUPPORT


4

We have listed most of our FAQ's (Frequently Asked Questions) at: http://www.adesso.com/faqs.asp. Please visit our FAQ Service & Support pages before you contact our E-mail or Telephone Support.

Email Support: If our FAQ's do not help you resolve your issues, please email support@adesso.com

Telephone Support: Toll Free: (800) 795-6788 9:00AM to 5:00PM PST Monday - Friday

INSTALLATION

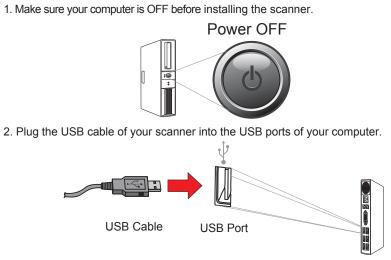

3. Turn ON your computer and the scanner will automatically be recognized by your computer. Power ON



Windows will detect the driver for the scanner automatically. No driver required

SCANNING MODE:






INTRODUCTION:

The Adesso Nuscan 5200TU is compatible with a wide range of 1D and 2D barcode symbologies. With COMS imager the Nuscan 5200TU is able to scan major 2D barcodes such as PDF 417, QR Codes, Data Matrix, Maxi Code, and Aztec Code. As your daily peripheral companion, your peripheral must be able to provide you with good hygiene and cleaniness. Built with waterproof and antimicrobial substances, the Nuscan 5200TU can be cleaned periodically. Its 7 meter drop protection also adds to its ruggedness. With all these great features, the Nuscan 5200TU is truly your ultimate barcode scanner.

BARCODE SYMBOLOGIES: Compatible 2D Barcodes

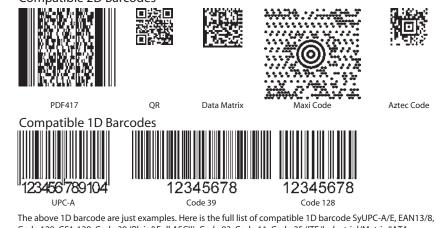

Code 128, GS1-128, Code 39 (Plain&Full ASCII), Code 93, Code 11, Code 25 (ITF/Industrial/Matrix/IATA Standard), Codabar, MSI/MSI Plessey, GS1 DataBar

REQUIREMENT:

| • An Available USB Port | 3 |
|-------------------------|---|
|-------------------------|---|

CAUTION

2

To avoid damage to the eyes. Do not look directly into the light beam.

USAGE TIP

Do not hold the scanner directly over a barcode at 90°. Scanning light bounces directly back into the scanner from the barcode label is known as specular reflection which will create a "dead zone" where decoding is difficult. So instead of a 90° head-on approach, tilt the scanner up to 60° forward or backward to achieve a successful decode. Practice a few times to find what range of angles works best.

MAINTENANCE

LED Light Setting:

Cleaning the scan window is the only maintenance required. A dirty window may affect scanning accuracy. Wipe the scanner window gently with a lens tissue or other material suitable for cleaning optical material.

NOTE

(POS, or Inventory software is not included, however the scanner works well with all 3rd party software, including MS WORD, Excel and Notepad)

6

COMMON SETTINGS:





Normal (white LED light turns on when triggered)



5









 \bigcirc

<u>Beeper Vol.</u> (High):



Horizontal Tab:









nen triggered) Always On (white LED



(constantly off)

Note:

8

If you need to make changes in the configuration of the scanner for specific applications, a full Programming Guide can be downloaded at:

http://www.adesso.com/download/user-manual/NuScan5200TU.pdf

9

NuScan 5200TU_QSG_EN_072917